
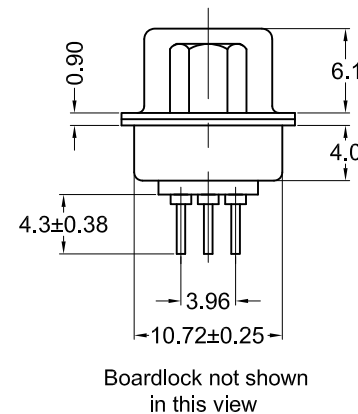
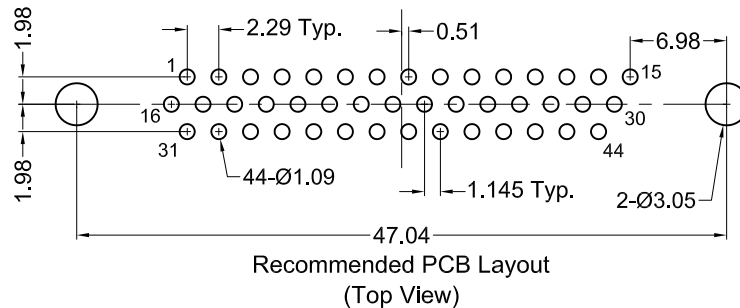
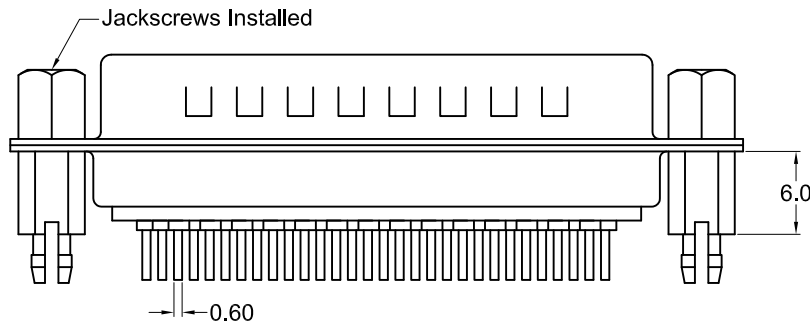


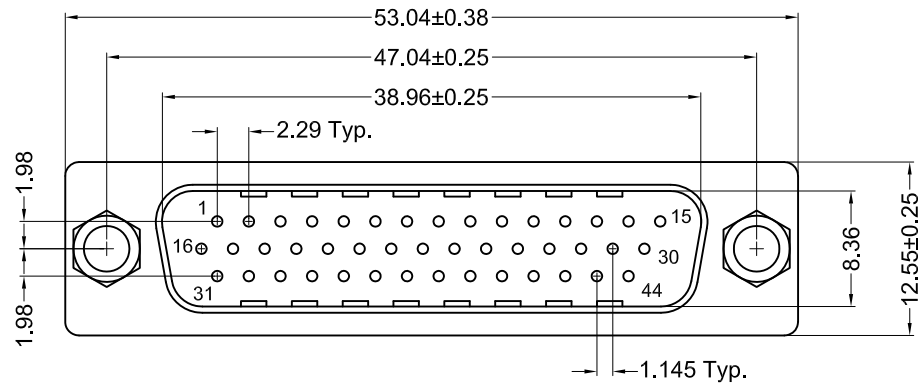

Material and Finish

Shell: Steel, Nickel plated

Insulator: PBT thermoplastic
with glass-fiber reinforcement,
UL94V-0 rated
Color: Black

Contact Material:
Plug - Brass

Contact Plating Options:

Standard: gold flash on
mating end, tin on
termination end, nickel
underplate on entire contact

15 Option: 15u" gold on
mating end, tin on
termination end, nickel
underplate on entire contact

30 Option: 30u" gold on
mating end, tin on
termination end, nickel
underplate on entire contact

Electrical Specifications

Rated Current: 1.5A

Rated Voltage: 30Vac

Insulation Resistance:
more than 1000 megohms at
500V DC

Contact Resistance:
13 milliohms max.

Dielectric Withstanding Voltage:
1000V for 1 minute

Operating Temperature:
-55°C to +105°C

Part Number	Contact Area Plating Finish
K86X-BD-44P-BRJ	Gold Flash (standard)
K86X-BD-44P-BRJ15	15u" Gold (15 option)
K86X-BD-44P-BRJ30	30u" Gold (30 option)

RoHS COMPLIANT

UL
E140125

SP
LR78160

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	03/30/09	New Drawing	S. Vien	H. MA	S. Vien	02/24/09
A2	9/15/14	ECO#14-028	H. MA	P. DalCanto		
A3	12/31/17	ECO# 17-033	G. Serrato	C. Furumasu		
					UNITS	
					mm	

K86X-BD-44P-BRJ

D-Sub, HD, Vertical, RoHS Compliant

44 Pin Male, JS, BoardLocks

